


Elongated Fittings

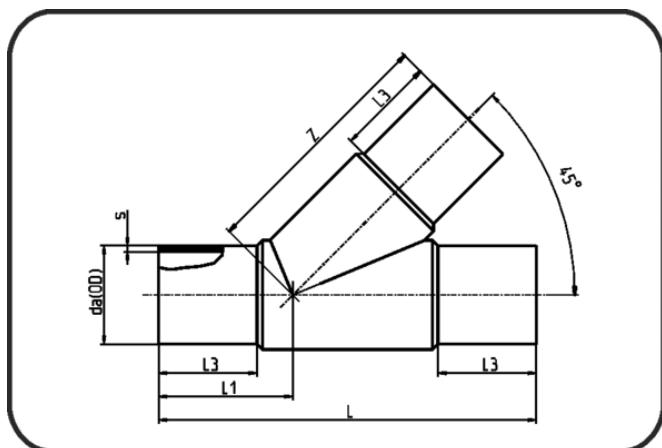

Code: 036

- Tee 45°
- long spigot
- injection moulded
- Butt + E-socket-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	L1 mm	Weight
63	70.036.0063.17	63X3,8 SDR17 ISO S-8	63	3,8	170	262	64	93	0.39
75	70.036.0075.17	75X4,5 SDR17 ISO S-8	75	4,5	191	294	71	103	0.62
90	70.036.0090.17	90X5,4 SDR17 ISO S-8	90	5,4	230	354	82	122	1.08
110	70.036.0110.17	110X6,6 SDR17 ISO S-8	110	6,6	248	380	84	131	1.59
125	70.036.0125.17	125X7,4 SDR17 ISO S-8	125	7,4	297,5	440	93	140	2.665
140	70.036.0140.17	140X8,3 SDR17 ISO S-8	140	8,3	315,5	464	94	150	3.3
160	70.036.0160.17	160X9,5 SDR17 ISO S-8	160	9,5	360	521	98	166	4.82
180	70.036.0180.17	180X10,7 SDR17 ISO S-8	180	10,7	380	557	105	179	6.444
200	70.036.0200.17	200X11,9 SDR17 ISO S-8	200	11,9	407	598	113	191	8.42
225	70.036.0225.17	225X13,4 SDR17 ISO S-8	225	13,4	464	670	120	206	11.98
32	70.036.0032.11	32X3,0 SDR11 ISO S-5	32	3	131	195	45	65	0.12
40	70.036.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	137	208	50	72	0.175
50	70.036.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	144	224	56	81	0.28
63	70.036.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	173	262	64	93	0.51
75	70.036.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	191	294	71	103	0.785
90	70.036.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	230	351	82	122	1.385
110	70.036.0110.11	110X10,0 SDR11 ISO S-5	110	10	253	382	84	131	2.119
125	70.036.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	299	431	92	140	3.29
140	70.036.0140.11	140X12,7 SDR11 ISO S-5	140	12,7	315,5	464	94	150	4.28
160	70.036.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	362	526	100	166	6.375
180	70.036.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	385	562	107	179	8.6
200	70.036.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	416	605	114	191	11.24
225	70.036.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	474	673	122	206	16.06