NORMA


produced by IVE Tech



IVE CLAMPS

FOR FAST SEALING AND COUPLING


UNIVERSAL USE IN VARIOUS FIELDS

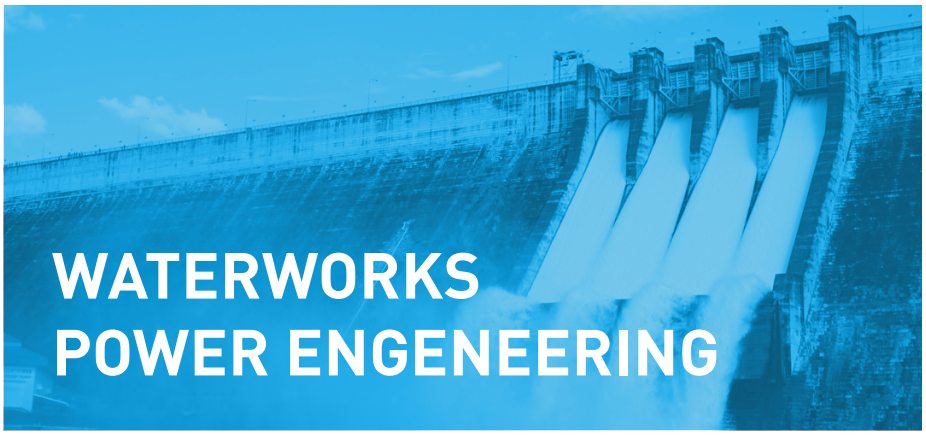







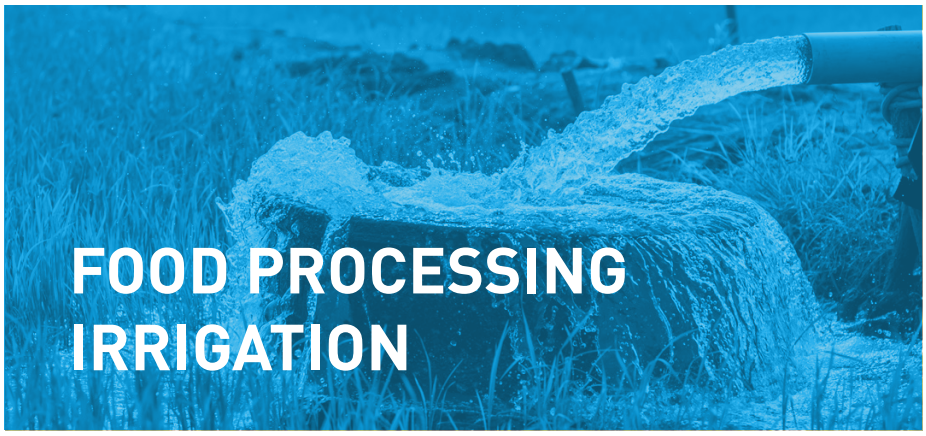



Reasons to use IVE clamp

- Simple installation
- Proven quality
- Money saving
- Short delivery time of all dimensions
- Top references

NORMA
produced by IVE Tech

COMPLETE SOLUTION FOR YOUR PIPELINE



IVE STANDARD

For common repair or coupling of all dimensions and materials

sealing EPDM / NBR / Silicon
in dimensions: DN 40 - DN 2500



IVE PLUS

Clip clamp for fast repair in tough conditions

sealing EPDM / NBR
in dimensions: DN 60 - DN 125



IVE FLEX

Progressive sealing for weld corrosion or for misalignment coupling

sealing EPDM / NBR
in dimensions: DN 80 - DN 400



IVE MINI

Repair clamp for pin holes of small dimension pipes

sealing EPDM / NBR
in dimensions: DN 25 - DN 40



IVE DOUBLE/TRIPLE

For progressive sealing of lengthways cracks or larger dimensions

sealing EPDM / NBR
in dimensions: DN 40 - DN 2500

The IVE repair clamps are intended for the quick and completely safe repairs of pipeline

The IVE repair clamps are intended for the quick and completely safe repairs of pipeline made from wide range of materials. IVE clamp provides dependable fixing of leakage caused by corrosion, cracks, or cross breakage. It will also provide coupling or connection of two pipes. Leakproof for water, oil and for solid bulk. The big strength of IVE clamp is its low weight resulting from design of clamping system which at the same time enables application in places with minimum workspace.



Based on customer needs we are able to produce various dimensions, lengths and solutions

SIMPLE TECHNICAL SOLUTION AND STAINLESS-STEEL MATERIAL

The casing and clamping system are made of stainless steel (AISI 304/AISI 316L). The labyrinth rubber gasket is made of sanitarily safe EPDM (NBR/Silicon on request) with lifetime of 30+ years and it guarantees a perfect sealing for pipe joints and damages. Stainless steel screws have PTFE coating for easy (un)installation. Working pressure is max 16 bar. As the pipe dimension increases, the possibility of maximum pressure decreases. The temperature range is depending on type of rubber gasket. Follow the fitting instruction.

Pipe materials:

- ductile cast iron
- steel
- fibre cement
- PE
- PVC

Aplication:

- corrosion leakage
- cross breakage
- lengthways cracks
- pipe coupling



Certificates

	Components	Materials
1	Casing	1.4301/ 1.4404
2	Bars	1.4301/ 1.4404 (A2/A4)
3	Bolts	1.4301/ 1.4404
4	Sealing	EPDM / NBR / MVQ

UNIVERSAL USE IN VARIOUS FIELDS

produced by IVE Tech

IVE repair clamps and couplings are widely used in all areas where piping systems are operated. They are used in waterworks and energy engineering, including nuclear power plants, for which they meet the strictest technical parameters. Thanks to hygienic certificates, they are also intended for the area of agriculture and food industry, where specific standards are also required. Finally, they are used in the construction and industry segment, where they can be used in refineries and chemical plants.















produced by IVE Tech

NORMA Group
Edisonstraße 4 · D-63477 Maintal
Tel: +49 (61 81) 4 03-0
Fax: +49 (61 81) 4 03-2 10
www.normagroup.com
info@normagroup.com

NORMA®
NORMA**CLAMP**®
NORMA**CONNECT**®
NORMA**FIX**®
are registered trademarks of NORMA Germany GmbH.



This catalogue supersedes all previous issues. No part of this publication may be reproduced without our prior written consent. In NORMA Group's policy of continual product improvements to meet user needs and technological developments, all models and sets listed in this folder (photographs, specifications, sizes and weights) may be upgraded or discontinued without notice and without any obligation on our part to modify tools or equipment sold previously. The recommendations for use and safety given in this folder do not replace accepted good practice or the safety related legal and regulatory provisions. References to standards implemented as of May 1st, 2019 are not contractually binding.

1-2B-6-190901-DE